


PETLAR-PRM grade is a Biaxially Oriented Vacuum Metallized Polyester Film with enhanced barrier and high gloss properties. The base film used is one side corona treated polyester film. Metallization can be done on corona/untreated side of base film. The film possesses good mechanical, surface & thermal properties and ensures excellent processability. PETLAR-PRM grade conforms to latest EC directives, REACH specifications and US FDA regulations for food contact applications. This grade is available in a thickness range of 8 to 75 Microns (32-300 Gauge).

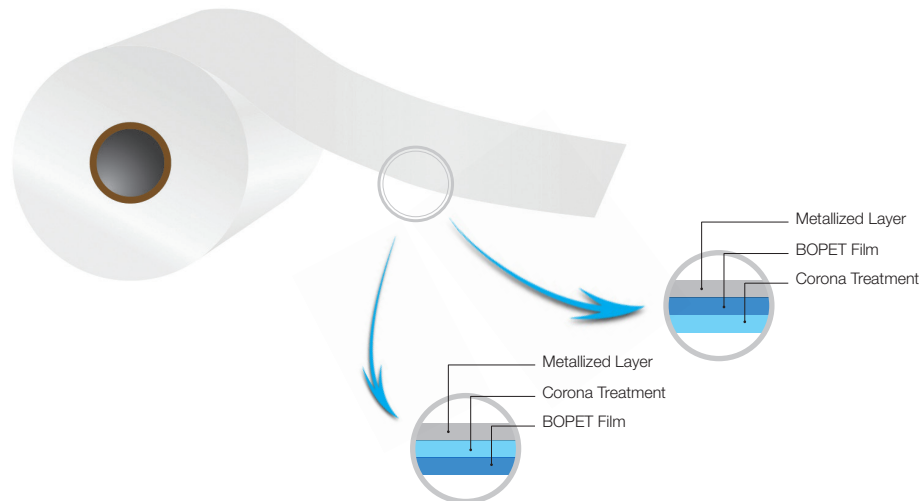

APPLICATIONS

- Flexible Packaging
Printing, Coating, Lamination
- Flexible Air Ducts & Air Connectors
(UL Certified)

Standard Roll Presentation - 6 Inch / 152 mm Core Diameter									
Thickness (Micron)		8	10	12	23	36	50	75	
Length (Meters)	3000						495	590	Approx Outer Roll Diameter (mm)
	6000				475	570	675	810	
	9000				560	700			
	12000				650	795			
	18000	485	535	580					
	24000	550	610	660					
	36000	660	735	795					
	42000		800	850					
Width Range		400-2500 mm / 15-99 Inch							
<i>Customised specs also available on request</i>									

Standard Roll Presentation - 3 Inch / 76 mm Core Diameter							
Thickness (Micron)		10	12	23	36	50	
Length (Meters)	3000				400	460	Approx Outer Roll Diameter (mm)
	6000			450			
	9000	370	400	545			
	12000	425	455				
	18000	515	560				
Width Range		400-1500 mm / 15-59 Inch					
<i>Customised specs also available on request</i>							

SRF Limited, Packaging Films Business

Block-C, Sector-45, Gurgaon-122003, Haryana, India Tel: (+91-124) 435 4400, Fax: (+91-124) 435 4500, pbfilms@srf.com, www.srf.com

Indore: Plot No C 1-8, C 21-30, Indore Special Economic Zone, Pithampur - 454775, Distt. Dhar, Madhya Pradesh, India.

Kashipur: Plot No -12, Rampura, Ramnagar Road, Kashipur-244713, Distt. Udham Singh Nagar, Uttaranchal, India.

Rayong: D-20, Hemraj Eastern Seaboard Industrial Estate, 112, M003, Tambon Tasith, Amphur Pluakdaeng, Rayong Province 21140, Thailand.



Typical values

Properties	Unit	Test Method	Product Code											
			PRM0080	PRM0090	PRM0100	PRM0110	PRM0120	PRM0150	PRM0190	PRM0230	PRM0300	PRM0360		
GENERAL														
Nominal Thickness	Micron	SRF Method	08	09	10	11	12	15	19	23	30	36		
	Gauge		32	36	40	44	48	60	76	92	120	144		
Yield	m ² /kg	SRF Method	90	80	72	65	60	48	38	31	24	20		
	in ² /lb		63300	56300	50600	46000	42200	33700	26600	22000	16800	14000		
MECHANICAL														
Tensile Strength (min)	MD	kg/cm ²	ASTM D 882	2000	2000	2000	2000	2000	2000	2000	1900	1900	1900	
				kpsi	29	29	29	29	29	29	29	29	27	27
	TD	kg/cm ²		2100	2100	2100	2100	2100	2100	2100	2100	2000	2000	1900
				kpsi	30	30	30	30	30	30	30	30	29	29
Elongation at Break (min)	MD	%	ASTM D 882	110	110	110	110	110	110	110	120	120	125	
	TD			100	100	100	100	100	100	100	110	110	115	
THERMAL														
Shrinkage (150°C, 30 min)	MD	%	ASTM D 1204	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	
	TD			0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	
OPTICAL, BARRIER & METAL BOND STRENGTH														
Optical Density*	-	SRF Method	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2		
WVTR (38°C & 90% RH)	gm/m ² /day	ASTM F 1249	1.5	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
	gm/100in ² /day		0.09	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06		
OTR (23°C & 0% RH)	cc/m ² /day	ASTM D 3985	1.5	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
	cc/100in ² /day		0.09	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06		
Metal Bond Strength	gm/25mm	SRF Method	240	240	240	240	240	240	240	240	240	240		
OPTICAL, BARRIER & METAL BOND STRENGTH														
Optical Density*	-	SRF Method	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5		
WVTR (38°C & 90% RH)	gm/m ² /day	ASTM F 1249	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7		
	gm/100in ² /day		0.06	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04		
OTR (23°C & 0% RH)	cc/m ² /day	ASTM D 3985	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
	cc/100in ² /day		0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06		
Metal Bond Strength	gm/25mm	SRF Method	240	240	240	240	240	240	240	240	240	240		

* As measured on Tobias Densitometer MD – Machine Direction | TD – Transverse Direction

Notes: 1) Metallized side is available wound inside/outside of the roll - customer to specify accordingly; 2) Metallization with Plasma Treatment for uniform and enhanced metal adhesion is available; 3) Above properties can be modified to suit customer's requirement; 4) Unless otherwise specified, the values given above are nominal.

DISCLAIMER

The information contained herein is to be used only as a guideline for using PETLAR film. The specifications and characteristics mentioned are based on reliable test procedures. Users of this film should make independent assessment by their own for its suitability to their end use. SRF Ltd does not offer any guarantee on the results and does not accept any liability arising out of the use of the information contained herein.