


# Sealable Clear BOPP Film

# OPLAR SCL (T01) Low SIT

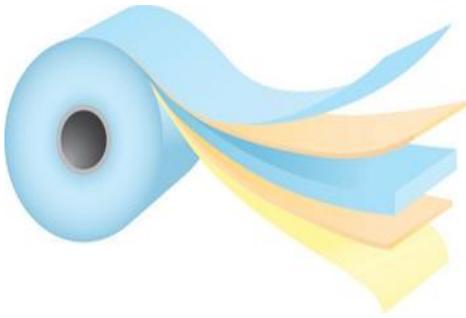

CORONA TREATED SKIN  
MODIFIED INTERMEDIATE LAYER  
OPP CORE LAYER  
MODIFIED INTERMEDIATE LAYER  
UNTREATED HEAT SEALABLE SKIN

### Product Features

- Low seal initiation temperature
- Consistent and stable slip
- Good anti-static properties
- Suitable for various printing & lamination machine

OPLAR-SCL T01 grade is Sealable Clear BOPP Film is transparent with both side heat sealable capabilities. Untreated side has low seal initiation temperature (90°C), designed for high speed packaging application. The corona treated side is specifically designed for excellent adhesion of inks and lamination adhesives.

### Typical Applications

- Pillow packs
- Health and beauty products
- Frozen foods
- Confectionary
- Detergents

Properties		Unit	Test Method	18	20	25	30
Nominal Thickness		Micron	Internal	18	20	25	30
Grammage		g/m <sup>2</sup>	ASTM D 1505	16.4	18.2	22.8	27.3
Yield		m <sup>2</sup> /kg	Internal	61.1	54.9	44.0	36.6
Density		g/cc	Internal	0.91			
<b>SURFACE PROPERTIES</b>							
Treatment Level	TI/TO	dyne/cm	ASTM D 2578	38	38	38	38
Haze		%	ASTM D 1003	1.8	2	2.2	2.5
Gloss		^45°	ASTM D 2457	85	85	85	85
Static Charge		Kv	ASTM D 2578	<1			
Coefficient of Friction	UT/UT	Kinetic	ASTM D 1894	0.25	0.25	0.25	0.25
<b>MECHANICAL PROPERTIES</b>							
Tensile Strength	MD	kg/cm <sup>2</sup>	ASTM D 882	1300	1300	1300	1300
	TD			2500	2500	2500	2500
Tensile Elongation	MD	%	ASTM D 882	190	190	190	190
	TD			60	60	60	60
Elastic Modulus	MD	kg/cm <sup>2</sup>	ASTM D 882	18000	18000	18000	18000
	TD			29000	29000	29000	29000
<b>THERMAL PROPERTIES</b>							
Shrinkage	MD	%	Internal	4	4	4	4
	TD			2	2	2	2
Heat Seal Range	UT	°C	Internal	90-145			
Heat Seal Strength	UT/UT	g/25mm	130°C/2 Bar/1 Sec	300	300	350	350
<b>BARRIER PROPERTIES</b>							
WVTR		g/m <sup>2</sup> /day	ASTM F 1249	8	7.5	7	5
OTR		cc/m <sup>2</sup> /day	ASTM D 3985	2800	2700	2300	2100

MD: Machine Direction, TD: Transverse Direction, TI: Treated Inside, TO: Treated Outside, UT: Untreated

**Disclaimer:** The information provided above is based on SRF FLEXIPAK conclusive tests, which are indicative only and provided as guidelines. Customers are solely responsible for the end use in all respects. Customers should verify the suitability of the film for its end use. SRF FLEXIPAK gives no warranty or accepts liability for any loss and fitness of the product for any specific purpose. SRF FLEXIPAK reserves the right to change the technical data sheet at any time for enhancing the quality of the product without prior information.

**Storage Conditions** between 22-30°C & RH 40-60% is recommended in order to minimize the deterioration of the film properties in general. It is advisable to turn out the inventory on FIFO basis. The film should be conditioned in the operating environment for at least 24 hours before processing.

### SRF Limited, Packaging Films Business

Corporate: Block-C, Sector-45, Gurgaon-122003, Haryana, India

Tel: (+91-124) 435 4400, Fax: (+91-124) 435 4500, pfbfilms@srf.com, [www.srf.com](http://www.srf.com)

SRF Flexipak (South Africa) (Pty) Ltd. 5 Eddie Hagan Drive, Cato Ridge, KwaZulu - Natal, South Africa

