


PETLAR-PUHM grade is a Biaxially Oriented Optically Ultra High Clear Vacuum Metallized Polyester Film with acrylic coating. It is characterized by very high transparency and good slip property. The film possesses good mechanical, surface & thermal properties and ensures excellent processability. PETLAR-PUHM grade conforms latest EC directives, REACH specifications and US FDA regulations for food contact applications. This grade is available in thickness range of 12 to 36 Microns (48-144 Gauge).

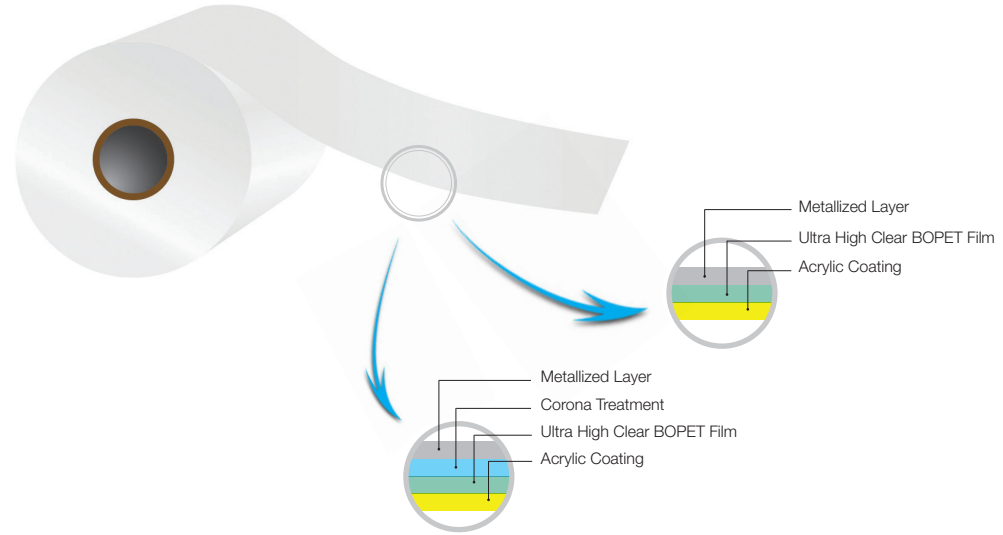

## APPLICATIONS

- Flexible Packaging
- Lamination
- Glitters
- Labels
- Photosensitive Coatings

Standard Roll Presentation - 6 Inch / 152 mm Core Diameter							
		Thickness (Micron)	12	19	23	30	36
Length (Meters)	6000		440	475	540	570	Approx Outer Roll Diameter (mm)
	9000		525	560	650	700	
	12000		600	650	740	795	
	18000	580	715				
	24000	660					
	36000	795					
	42000	850					
Width Range		400-2500 mm / 15-99 Inch					
<i>Customised specs also available on request</i>							

Standard Roll Presentation - 3 Inch / 76 mm Core Diameter								
		Thickness (Micron)	12	19	23	30	36	
Length (Meters)	3000						400	Approx Outer Roll Diameter (mm)
	6000			415	450	515		
	9000	400	500	545				
	12000	455	580					
	18000	560						
Width Range		400-1500 mm / 15-59 Inch						
<i>Customised specs also available on request</i>								

## SRF Limited, Packaging Films Business

Block-C, Sector-45, Gurgaon-122003, Haryana, India Tel: (+91-124) 435 4400, Fax: (+91-124) 435 4500, pbfilms@srf.com, www.srf.com



**Indore:** Plot No C 1-8, C 21-30, Indore Special Economic Zone, Pithampur - 454775, Distt. Dhar, Madhya Pradesh, **India.**

**Kashipur:** Plot No -12, Rampura, Ramnagar Road, Kashipur-244713, Distt. Udham Singh Nagar, Uttaranchal, **India.**

**Rayong:** D-20, Hemraj Eastern Seaboard Industrial Estate, 112, M003, Tambon Tasith, Amphur Pluakdaeng, Rayong Province 21140, **Thailand.**



Typical values

Properties	Unit	Test Method	Product Code					
			PUHM0120	PUHM0190	PUHM0230	PUHM0300	PUHM0360	
<b>GENERAL</b>								
Nominal Thickness	Micron	SRF Method	12	19	23	30	36	
	Gauge		48	76	92	120	144	
Yield	m <sup>2</sup> /kg		60	38	31	24	20	
	in <sup>2</sup> /lb		42200	26600	22000	16800	14000	
<b>MECHANICAL</b>								
Tensile Strength (min)	MD	ASTM D 882	2000	2000	1900	1900	1900	
			kpsi	29	29	27	27	27
	TD		kg/cm <sup>2</sup>	2100	2100	2000	2000	1900
			kpsi	30	30	29	29	27
Elongation at Break (min)	MD	ASTM D 882	110	110	120	120	125	
	TD		100	100	110	110	115	
<b>THERMAL</b>								
Shrinkage (150°C, 30 min)	MD	ASTM D 1204	2.2	2.2	2.2	2.2	2.2	
	TD		0.4	0.4	0.4	0.4	0.4	
<b>OPTICAL &amp; BARRIER</b>								
Optical Density*		-	2.2	2.2	2.2	2.2	2.2	
WVTR (38°C & 90% RH)	gm/m <sup>2</sup> /day	ASTM F 1249	0.4	0.4	0.4	0.4	0.4	
	gm/100in <sup>2</sup> /day		0.025	0.025	0.025	0.025	0.025	
OTR (23°C & 0% RH)	cc/m <sup>2</sup> /day	ASTM D 3985	0.8	0.8	0.8	0.8	0.8	
	cc/100in <sup>2</sup> /day		0.05	0.05	0.05	0.05	0.05	

\* As measured on Tobias Densitometer MD – Machine Direction | TD – Transverse Direction

Notes: 1) Metallized side is available wound inside/outside of the roll - customer to specify accordingly; 2) Metallization with Plasma Treatment for uniform and enhanced metal adhesion is available; 3) Above properties can be modified to suit customer's requirement; 4) Unless otherwise specified, the values given above are nominal.

#### DISCLAIMER

The information contained herein is to be used only as a guideline for using PETLAR film. The specifications and characteristics mentioned are based on reliable test procedures. Users of this film should make independent assessment by their own for its suitability to their end use. SRF Ltd does not offer any guarantee on the results and does not accept any liability arising out of the use of the information contained herein.